

East Star Electronics Co., Ltd

Varistor Type MYL1-20KA



■ Features

- ▼ (200V-1800V)Varistor voltage (200V-1800V)
- ▼ Excellent non-linearity coefficient
- ▼ Great withstanding surge current
- ▼ Fast response time

■ Recommended Applications

- ▼ Protection of semiconductor
- ▼ Surge protection of consumer equipment
- ▼ Surge protection of communication, measuring of controller instrument
- ▼ Relay or electro magnetic surge absorption

■ Explanation of Part Numbers

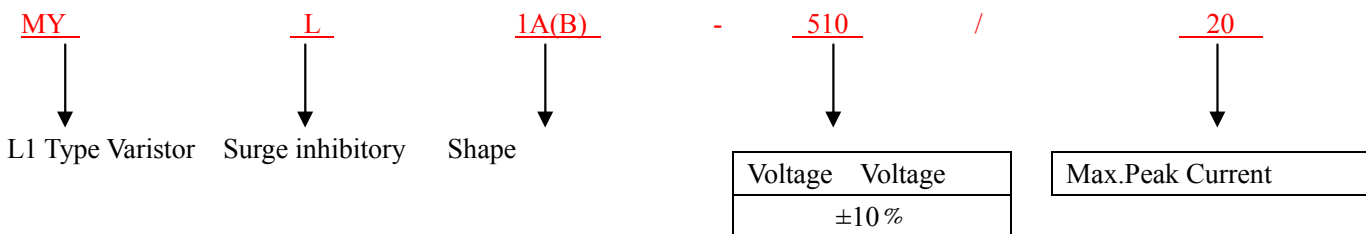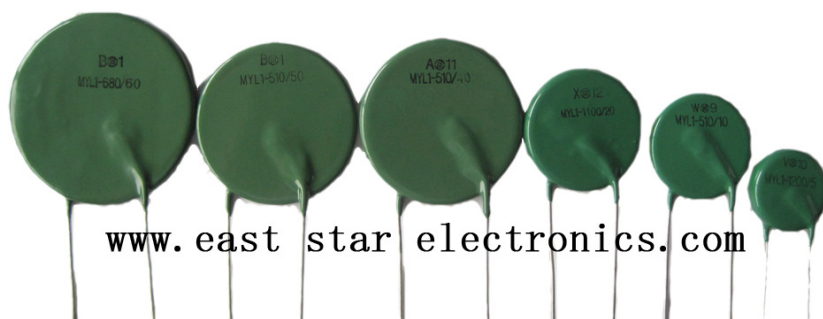

■ Dimension

	Range of voltage V	Dimensions(mm)				
		D max	T max	W	d	
MYL1A —20KA	200~1200	45	14	20~25	1.5	MYL1A型

Tel: 0086-0756-2266731


Fax: 0086-0756-3362716

Web: www.eaststarelectronics.com

E-mail: eaststar@zhese.net

Add: 10F Xinhai Commercial Building ,No 104 Yuan Lin Road ,Jida District ,Zhuhai, Guangdong , China

East Star Electronics Co., Ltd

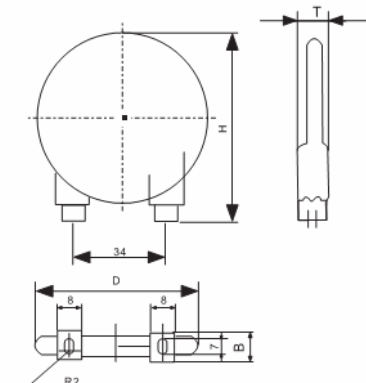	Range of voltage V	Dimensions(mm)				
		D max	H	B	Tmax	
MYL1B —20KA	200~1200	45	55	15	15	

Model No.	Varistor Voltage V	Max. Allowable Voltage		Max. Clamping Voltage		Max. peak Current A	Energy 2ms(A)	Rated Power W	Capacitance (Reference) 1KHZ PF
		Acrms (V)	DC (V)	Vc (V)	Ip (A)				
MYL1A(B)200/20	200(180~220)	130	170	340	250	20000	150	1.2	6200
MYL1A(B)220/20	220(198~242)	140	180	360	250	20000	150	1.2	5500
MYL1A(B)240/20	240(216~264)	150	200	395	250	20000	150	1.2	5100
MYL1A(B)270/20	270(243~297)	175	225	455	250	20000	150	1.2	4800
MYL1A(B)300/20	300(270~330)	195	250	495	250	20000	150	1.2	4300
MYL1A(B)330/20	330(297~363)	210	275	540	250	20000	150	1.2	4000
MYL1A(B)360/20	360(324~396)	230	300	595	250	20000	150	1.2	3800
MYL1A(B)390/20	390(351~429)	250	320	650	250	20000	150	1.2	3400
MYL1A(B)430/20	430(387~473)	275	385	710	250	20000	150	1.2	3100
MYL1A(B)470/20	470(423~517)	300	385	775	250	20000	150	1.2	2800
MYL1A(B)510/20	510(459~561)	320	430	855	250	20000	150	1.2	2600
MYL1A(B)560/20	560(504~616)	350	455	945	250	20000	150	1.2	2400
MYL1A(B)620/20	620(558~682)	380	505	1025	250	20000	150	1.2	2100
MYL1A(B)680/20	680(612~748)	420	560	1120	250	20000	150	1.2	1900
MYL1A(B)750/20	750(675~825)	460	615	1240	250	20000	150	1.2	1700
MYL1A(B)780/20	780(702~858)	485	640	1280	250	20000	150	1.2	1600
MYL1A(B)820/20	820(735~902)	510	670	1355	250	20000	150	1.2	1500
MYL1A(B)910/20	910(819~1000)	550	745	1500	250	20000	150	1.2	1500
MYL1A(B)1000/20	1000(900~1100)	625	825	1650	250	20000	150	1.2	1350
MYL1A(B)1100/20	1100(990~1210)	680	895	1815	250	20000	150	1.2	1200
MYL1A(B)1200/20	1200(1080~1320)	750	970	1980	250	20000	150	1.2	1050
MYL1A(B)1300/20									
MYL1A(B)1800/20									

Tel: 0086-0756-2266731

Fax: 0086-0756-3362716

Web: www.eaststarelectronics.com

E-mail: eaststar@zhese.net

Add: 10F Xinhai Commercial Building ,No 104 Yuan Lin Road ,Jida District ,Zhuhai, Guangdong , China