

East Star Electronics Co., Ltd

Varistor Type MYL1-50KA



■ Features

- ▼ (200V-1800V)Varistor voltage (200V-1800V)
- ▼ Excellent non-linearity coefficient
- ▼ Great withstanding surge current
- ▼ Fast response time

■ Recommended Applications

- ▼ Protection of semiconductor
- ▼ Surge protection of consumer equipment
- ▼ Surge protection of communication, measuring of controller instrument
- ▼ Relay or electro magnetic surge absorption

■ Explanation of Part Numbers

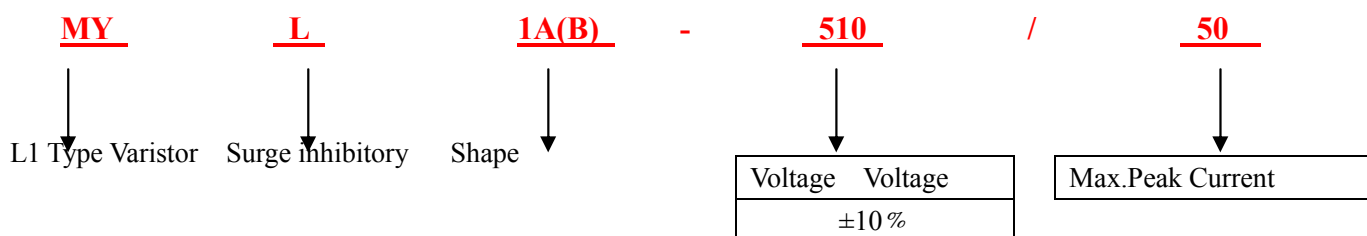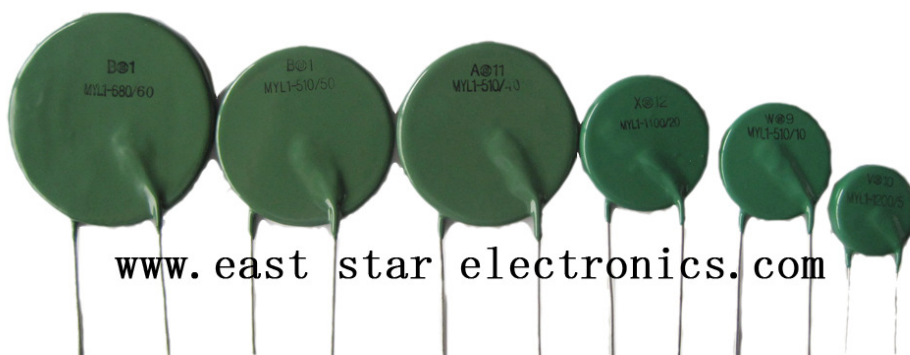

■ Dimension

	Range of voltage V	Dimensions(mm)				
		D max	T max	W	d	
MYL1A —50KA	200~1200	60	14	20~25	1.5	MYL1A型

Tel: 0086-0756-2266731


Fax: 0086-0756-3362716

Web: www.eaststarelectronics.com

E-mail: eaststar@zhese.net

Add: 10F Xinhai Commercial Building ,No 104 Yuan Lin Road ,Jida District ,Zhuhai, Guangdong , China

East Star Electronics Co., Ltd

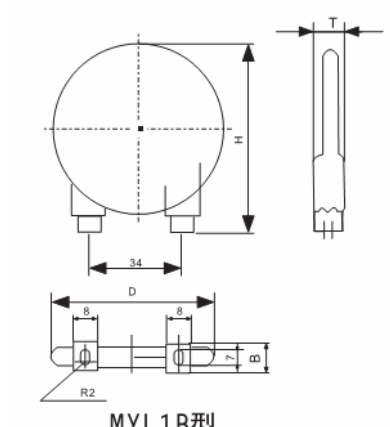	Range of voltage V	Dimensions(mm)				
		D max	H	B	Tmax	
MYL1B —50KA	200~1200	60	70	15	15	

Model No.	Varistor Voltage V	Max. Allowable Voltage		Max. Clamping Voltage		Max. peak Current A	Energy 2ms(A)	Rated Power W	Capacitance (Reference) 1KHZ PF
		Acrms (V)	DC (V)	Vc (V)	Ip (A)				
MYL1A(B)200/50	200(180~220)	130	170	340	350	50000	350	1.5	17000
MYL1A(B)220/50	220(198~242)	140	180	360	350	50000	350	1.5	15000
MYL1A(B)240/50	240(216~264)	150	200	395	350	50000	350	1.5	14000
MYL1A(B)270/50	270(243~297)	175	225	455	350	50000	350	1.5	12000
MYL1A(B)300/50	300(270~330)	195	250	495	350	50000	350	1.5	9600
MYL1A(B)330/50	330(297~363)	210	275	540	350	50000	350	1.5	8900
MYL1A(B)360/50	360(324~396)	230	300	595	350	50000	350	1.5	7700
MYL1A(B)390/50	390(351~429)	250	320	650	350	50000	350	1.5	6900
MYL1A(B)430/50	430(387~473)	275	385	710	350	50000	350	1.5	6500
MYL1A(B)470/50	470(423~517)	300	385	775	350	50000	350	1.5	6000
MYL1A(B)510/50	510(459~561)	320	430	855	350	50000	350	1.5	5500
MYL1A(B)560/50	560(504~616)	350	455	945	350	50000	350	1.5	5100
MYL1A(B)620/50	620(558~682)	380	505	1025	350	50000	350	1.5	4500
MYL1A(B)680/50	680(612~748)	420	560	1120	350	50000	350	1.5	4300
MYL1A(B)750/50	750(675~825)	460	615	1240	350	50000	350	1.5	3800
MYL1A(B)780/50	780(702~858)	485	640	1280	350	50000	350	1.5	3600
MYL1A(B)820/50	820(735~902)	510	670	1355	350	50000	350	1.5	3100
MYL1A(B)910/50	910(819~1000)	550	745	1500	350	50000	350	1.5	2800
MYL1A(B)1000/50	1000(900~1100)	625	825	1650	350	50000	350	1.5	2500
MYL1A(B)1100/50	1100(990~1210)	680	895	1815	350	50000	350	1.5	2400
MYL1A(B)1200/50	1200(1080~1320)	750	970	1980	350	50000	350	1.5	2300
MYL1A(B)1300/50									
MYL1A(B)1800/50									

Tel: 0086-0756-2266731

Fax: 0086-0756-3362716

Web: www.eaststarelectronics.com

E-mail: eaststar@zhese.net

Add: 10F Xinhai Commercial Building ,No 104 Yuan Lin Road ,Jida District ,Zhuhai, Guangdong , China