

# East Star Electronics Co., Ltd

## Varistor Type MYL1-60KA



### ■ Features

- ▼ (200V-1800V)Varistor voltage (200V-1800V)
- ▼ Excellent non-linearity coefficient
- ▼ Great withstanding surge current
- ▼ Fast response time

### ■ Recommended Applications

- ▼ Protection of semiconductor
- ▼ Surge protection of consumer equipment
- ▼ Surge protection of communication, measuring of controller instrument
- ▼ Relay or electro magnetic surge absorption

### ■ Explanation of Part Numbers

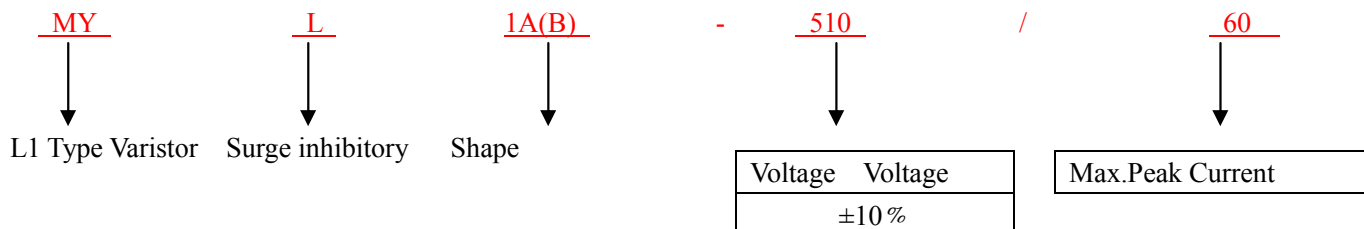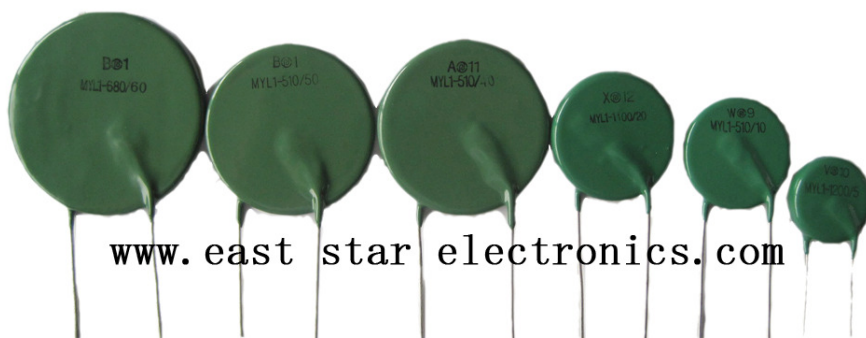

### ■ Dimension

	Range of voltage V	Dimensions(mm)				
		D max	T max	W	d	
MYL1A —60KA	200~1200	66	14	20~25	1.5	MYL1A型

Tel: 0086-0756-2266731


Fax: 0086-0756-3362716

Web: [www.eaststarelectronics.com](http://www.eaststarelectronics.com)

E-mail: eaststar@zhese.net

Add: 10F Xinhai Commercial Building ,No 104 Yuan Lin Road ,Jida District ,Zhuhai, Guangdong , China

# East Star Electronics Co., Ltd

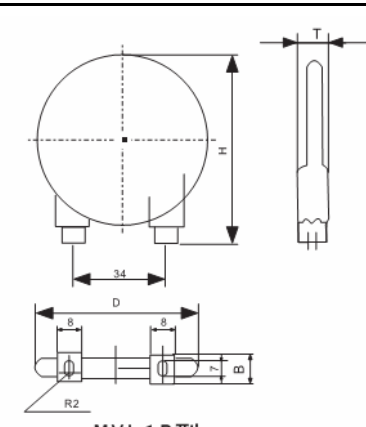	Range of voltage V	Dimensions(mm)				
		D max	H	B	Tmax	
MYL1B —60KA	200~1200	66	75	15	15	

Model No.	Varistor Voltage V	Max. Allowable Voltage		Max. Clamping Voltage		Max. peak Current A	Energy 2ms(A)	Rated Power W	Capacitance (Reference) 1KHZ PF
		Acrms (V)	DC (V)	Vc (V)	Ip (A)				
MYL1A(B)200/60	200(180~220)	130	170	340	350	60000	350	1.6	17000
MYL1A(B)220/60	220(198~242)	140	180	360	350	60000	350	1.6	15000
MYL1A(B)240/60	240(216~264)	150	200	395	350	60000	350	1.6	14000
MYL1A(B)270/60	270(243~297)	175	225	455	350	60000	350	1.6	12000
MYL1A(B)300/60	300(270~330)	195	250	495	350	60000	350	1.6	9600
MYL1A(B)330/60	330(297~363)	210	275	540	350	60000	350	1.6	8900
MYL1A(B)360/60	360(324~396)	230	300	595	350	60000	350	1.6	7700
MYL1A(B)390/60	390(351~429)	250	320	650	350	60000	350	1.6	6900
MYL1A(B)430/60	430(387~473)	275	385	710	350	60000	350	1.6	6500
MYL1A(B)470/60	470(423~517)	300	385	775	350	60000	350	1.6	6000
MYL1A(B)510/60	510(459~561)	320	430	855	350	60000	350	1.6	5500
MYL1A(B)560/60	560(504~616)	350	455	945	350	60000	350	1.6	5100
MYL1A(B)620/60	620(558~682)	380	505	1025	350	60000	350	1.6	4500
MYL1A(B)680/60	680(612~748)	420	560	1120	350	60000	350	1.6	4300
MYL1A(B)750/60	750(675~825)	460	615	1240	350	60000	350	1.6	3800
MYL1A(B)780/60	780(702~858)	485	640	1280	350	60000	350	1.6	3600
MYL1A(B)820/60	820(735~902)	510	670	1355	350	60000	350	1.6	3100
MYL1A(B)910/60	910(819~1000)	550	745	1500	350	60000	350	1.6	2800
MYL1A(B)1000/60	1000(900~1100)	625	825	1650	350	60000	350	1.6	2500
MYL1A(B)1100/60	1100(990~1210)	680	895	1815	350	60000	350	1.6	2400
MYL1A(B)1200/60	1200(1080~1320)	750	970	1980	350	60000	350	1.6	2300
MYL1A(B)1300/60									
MYL1A(B)1800/60									

Tel: 0086-0756-2266731

Fax: 0086-0756-3362716

Web: [www.eaststarelectronics.com](http://www.eaststarelectronics.com)

E-mail: eaststar@zhese.net

Add: 10F Xinhai Commercial Building ,No 104 Yuan Lin Road ,Jida District ,Zhuhai, Guangdong , China